

# Schindler PORT 4 Mini

## The Power of Two


We Elevate



**Schindler**

# Schindler PORT 4 Mini Specifications

Optimize lobby traffic and minimize congestion with stylish PORT functionality. With PORT 4 Mini, tenants and guests experience smooth, convenient authentication and receive personalized elevator assignments to destination floors directly at the gate. Integrated QR reader functionality makes visitor management efficient and secure. PORT 4 Mini is designed for use with the Boon Edam Lifeline Swing gate.

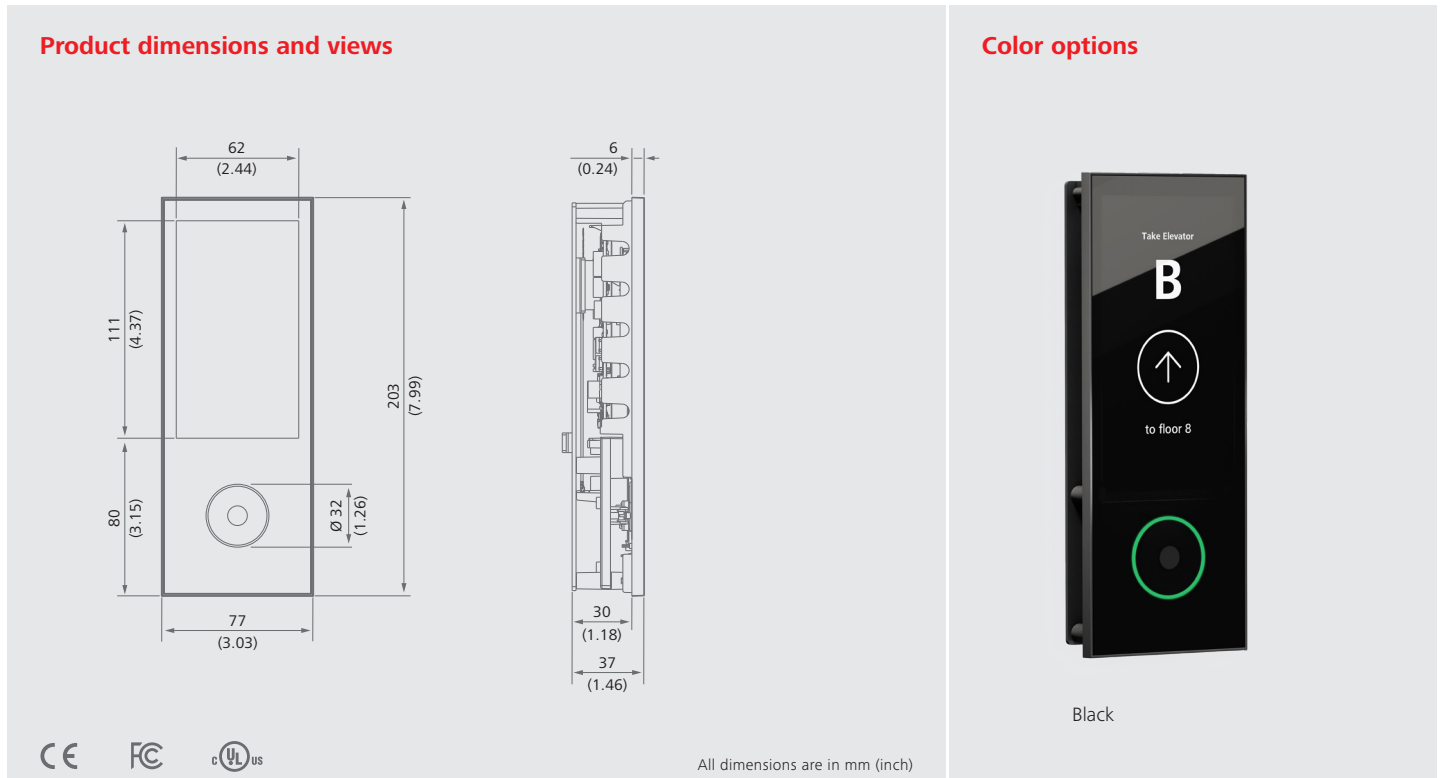

## Properties and dimensions

<b>Physical Dimensions (W×H×D)</b>	77×203×37 mm (3.03×7.99×1.46 inch)	<b>Card Reader</b>	Supports all common RFID tags (all tags must be prequalified by our test service center prior to installation)
<b>Power Supply</b>	24–48 VDC or PoE (IEEE 802.3af)	<b>Screen</b>	5" display, 720×1280 pixel, touch panel
<b>Power Consumption</b>	5 W	<b>Touchless Operation</b>	myPORT
<b>Standby Mode</b>	Yes, triggered by proximity sensor	<b>QR Code Camera</b>	Standard
<b>Range of Application</b>	Temperature: 0 to 45°C (14 to 113°F) Humidity: 0 to 90% non-condensing Indoor use only		

Schindler Management Ltd.  
Zugerstrasse 13  
6030 Ebikon  
Switzerland  
+41 41 445 30 60

[www.schindler.com](http://www.schindler.com)

**We Elevate**

This publication is for general informational purposes only and we reserve the right at any time to alter the product design and specifications. No statement contained in this publication shall be construed as a warranty or condition, expressed or implied, as to any product, its fitness for any particular purpose, merchantability, quality or shall be interpreted as a term or condition of any agreement regarding the products or services contained in this publication. Minor differences between printed and actual colors may exist.

Copyright © 2023 Schindler Aufzüge AG